



Roundflow cassette

Seasonal Smart

FCQG-F / RZQG Seasonal Smart



Slim install height designed for restricted space in suspended ceilings

Daikin's unique 360° Roundflow cassette, re-engineered. The Roundflow cassette meets Energy Related Products Directive minimum efficiency standards for Seasonal Efficiency, and has a slim install height designed for restricted space in suspended ceilings.

The Roundflow cassette has 23 different air flow settings for uniform airflow and temperature distribution, while the presence and floor sensors can detect people and adjust temperature and airflow direction to ensure comfort in offices and meeting rooms.

Energy savings can be made using the remote controller which gives control over set-point ranges and day-to-day use of controls. The controller also gives a kWh indication of the power consumed by the cassette and outdoor unit.


Energy efficiencies can be improved by utilising the selectable evaporating and condensing temperature option, making the Hi-COP cassette the ideal solution for energy conscious building managers.



BRC1E52A



RZQG140L8V1

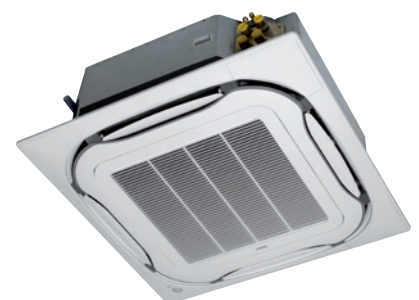

FCQG-F



FCQG-F / RZQG

Features	Benefits
Programmable air discharge outlets via remote control	Room configurations can be changed without re-positioning cassette
Selectable evaporating and condensing temperatures	Improves energy efficiency of the 'out of the box' system by 20%, saving money on running costs
D3 connection as standard	Allows integration of split system into Daikin building management systems
Presence sensor	Controlling temperature set point based on occupancy can reduce running costs by up to 27%
Self-cleaning decoration panel	Automatic cleaning of air-filter can save up to 30% in running costs

Indoor unit			Single Phase				3 Phase				
			FCQG71F	FCQG100F	FCQG125F	FCQG140F	FCQG71F	FCQG100F	FCQG125F	FCQG140F	
Cooling Capacity	Nominal	kW	6.8	9.5	12	13.4	6.8	9.5	12	13.4	
	UK Total	kW	7.76	10.8	13.6	14.9	7.76	10.8	13.6	14.9	
	UK Sensible	kW	5.32	7.44	9.3	10.25	5.32	7.44	9.3	10.25	
Heating Capacity	Nominal	kW	7.5	10.8	13.5	15.5	7.5	10.8	13.5	15.5	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+		A++		A+		
		Pdesign	kW	6.8	9.5	12.0	-	6.8	9.5	12.0	-
		SEER		6.80	6.80	6.00	-	6.80	6.80	6.00	-
		Annual energy consumption	kWh	350	488	700	-	350	488	700	-
	Heating (Average climate)	Energy label		A+	A++	A+	-	A+	A++	A+	-
		Pdesign	kW	6.3	11.3	12.7	-	6.3	11.3	12.7	-
		SCOP		4.20	4.61	4.10	-	4.20	4.61	4.10	-
	Annual energy consumption	kWh	2,110	3,431	4,322	-	2,110	3,431	4,322	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.39	3.87	3.73	3.21	3.39	3.87	3.73	3.21	
	COP		3.97	4.15	3.63	3.61	3.97	4.15	3.63	3.61	
Annual energy consumption (according to EN14825)	Annual energy consumption	kWh	1,005	1,225	1,610	2,085	1,005	1,225	1,610	2,085	
	Energy label	Cooling/Heating	A/A				A/A				
Nominal Power Input	Cooling / Heating	kW	2.01 / 1.89	2.45 / 2.6	3.22 / 3.72	4.17 / 4.3	2.01 / 1.89	2.45 / 2.6	3.22 / 3.72	4.17 / 4.3	
Dimensions (with deco-panel)	Height x Width x Depth	mm	204 (264) x 840 (950) x 840 (950)	246 (306) x 840 (950) x 840 (950)			204 (264) x 840 (950) x 840 (950)	246 (306) x 840 (950) x 840 (950)			
			Weight (with deco-panel)	kg	21 (26.4)	24 (29.4)			21 (26.4)	24 (29.4)	
Air Flow Rate	High / Low	m³/min	15 / 9.1	22.8 / 12.4	26 / 12.4	26 / 12.4	15 / 9.1	22.8 / 12.4	26 / 12.4	26 / 12.4	
Sound Power	High	dBA	51	54	58	58	51	54	58	58	
Sound Pressure	High / Low	dBA	33 / 28	37 / 29	41 / 29	41 / 29	33 / 28	37 / 29	41 / 29	41 / 29	
Refrigerant	Type		R410A				R410A				
Power Supply			From outdoor unit				From outdoor unit				
Controller			BRC1E52A wired				BRC1E52A wired				

Outdoor unit			RZQG71L9V1	RZQG100L9V1	RZQG125L9V1	RZQG140L9V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1
Dimensions	Height x Width x Depth	mm	990 x 940 x 320	1430 x 940 x 320			990 x 940 x 320	1430 x 940 x 320		
Weight		kg	78	99			80	101		
Operation Range	Cooling Min~Max	°CDB	-15°C to +50°C				-15°C to +50°C			
	Heating Min~Max	°CWB	-20°C to +15.5°C				-20°C to +15.5°C			
Sound Power	High	dBA	64	66	67	69	64	66	67	69
Sound Pressure	Nominal	dBA	48	50	51	52	48	50	51	52
Refrigerant	Type		R410A				R410A			
Power Supply			1~ / 50Hz / 220 - 240v				3~ / 50Hz / 400v			
Piping connections	Liquid (OD)/Gas	inches	3/8 / 5/8				3/8 / 5/8			
Piping Length (Maximum)		m	50	75			50	75		
Max Installation Height Difference		m	30				30			

Accessories
Self cleaning deco-panel (BYCQ140DG)
White louvred deco-panel (BYCQ140DW)
Presence sensor (BRYQ140A)
Fresh air intake kit (KDDQ55B140)

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com